

**QUICK RELEASE FITTINGS
AND SWIVELS**

5:20

5:20



HYDROSCAND QUICK RELEASE FITTINGS AND SWIVELS

PRODUCT GROUP 505, 520, 523, 524, 526

Hydroscand offers many types of quick release fittings for hydraulic and compressed air from the top providers in the market, for example FASTER, SNAP-TITE, TEMA, CEJN, HANSEN, GROMELLE and BRUNING. We can offer fittings with or without valves, drip-free fittings, screw fittings, with pressure eliminator and fittings for very high pressure up to 2000 bar. We also stock a complete range of quick release fittings according to ISO-standards.

Working pressure/PN

All working pressures (WP) are indicated next to the fittings. The Working pressure is for connected quick release fittings with safety factor of 1:4 or the safety factor that is specified by the manufacturer.

TABLE OF CONTENTS



	HYDRAULICS	PAGE
5550-02/03	HS QRA ISO 7241-1A	222
5550	Dust cover ISO 7241-1A	222
5550	Spare part kit ISO 7241-1A	222
5552-02/03	HS QRT	223
5552-09/10	T-series without valve	223
5552-22/23	T-series with eliminator	223
5552-02-03S	T-series AISI 316	223
5552	Dust cover HS T-series	223
5Txx	Grease nipple HS T-series	223
5552	Spare part kit HS T-series, Nitrile	223
5552	Spare part kit HS T-series, Viton	223
5552	HS QRF ISO 16028	224
5552-42/43	F series	224
5552-42/43V	F series with Viton seal	224
5552-42/43S	F series AISI 316	224
5552-46	F series with eliminator	224
5552-44/45	Dust cover HS F-series	224
5552-47	Spare part kit Nitrile	224
5TIF	Grease nipple HS F-series	227
5558-02/03	NV ISO A 7241-1A	225
5558-07	2NV/PV	225
5558-14/15	Faster NV, protection	225
5558-16	NV, spare part kit	225
5553-02/03	Hansen HK ISO 7241-1B	226
5553	Spare part kit ISO-B	226
5558-32/33	ISO B ISO 7241-1B	226
5558-34/35	Dust cover ISO B	226
5558-59	Spare part kit ISO B	226
5559-12/13	Bruning, drip-free	225
5559-14	Bruning, protection	225
5TFF	FF series	227
5TFF	FF series with eliminator	227
5TFF	Dust cover	227
5TFF	Spare part kit	227
5TFF	Grease nipple	227
5558-48/49	3FFV	228
5558-44	3FFV spare part kit	228
5558-80/81	CVV	228
5558-86/87	CVV protection	228
5558-99	CVV spare part kit	228
5S80	Stucchi VP	229
5S81	Stucchi VP protection	229
5558-22/23	VV	229
5558-38/39	VV protection	229
5558-24	VV spare part kit	229
5558-64/65	PVVM NPT-threaded quick release fitting	230
5558-66/67	PVVM protection	230
5558	PVVM spare part kit	230
5558-68/69	VF	231
5C10115	Cejn 115 drip-free	231
5C10116	Cejn 116	231
5C10125	Cejn 125	231



TABLE OF CONTENTS




	AIR PRESSURE/FLUIDS	PAGE
5C10320	Cejn series 320, compressed air fitting	233
5C10320	Cejn series 320, safety fitting	233
5C10410	Cejn series 410, compressed air fitting	233
5C10410	Cejn series 410, safety fitting	233
5T11	Tema 1100, compressed air fitting	234
5T11	Tema 1100N, compressed air fitting	234
5T13	Tema 1300/1300E, compressed air fitting	234
5T160	Tema 1600, compressed air fitting	235
5T162	Tema 1625, compressed air fitting	235
5T165	Tema 1650, compressed air fitting	235
5T170	Tema 1700, compressed air fitting	235
5T175	Tema 1750, compressed air fitting	236
5T180	Tema 1800/1800E, compressed air fitting	236
5T180	Tema 1800N, compressed air fitting	237
5T180	Tema 1800H, water fitting	237
5T21	Tema 2100, compressed air fitting	237
5T1	Tema, hose nipple	237
5552	Hydroscand blow gun	237
5552	Hydroscand spiral hose	237



	SWIVELS	PAGE
5576-02	Swivel, Heavy duty G M x F	238
5576-03	Swivel, Heavy duty UNF M x F	238
5576-04	Swivel, Heavy duty ORFS M x F	238
5576-05	Swivel, Heavy duty ORFS M x M	238
5576-9	Spare part kit Heavy duty swivel	238
5576-01	Swivel, straight	239
5577-01	Swivel, 90°	239
5590	High pressure swivel M x M BSP	239
5591	High pressure swivel M BSP F BSP	239
5590-03	Spare part high pressure swivel 5590/5591	239
5T	Tema swivel	240



	MISCELLANEOUS VALVES	PAGE
5Txx	Tema decompression valve	227
5554	Hose brake valve M BSP F BSP	240
5558-76	Back valve M x M BSP	240
5558-77	Back valve F x F BSP	240



Quick release fitting with dimensions and performance equivalent to ISO 7241-1 A series. Used in agriculture and in industries. Interchangeable with other fittings manufactured according to ISO7241-1 A series.

5550-02/03

HS QRA
ISO 7241-1A

PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Length
1/4"	5550-02-04	5550-03-04	35.0	G 1/4" F	71.0 mm
3/8"	5550-02-06	5550-03-06	31.5	G 3/8" F	79.5 mm
1/2"	5550-02-08	5550-03-08	25.0	G 1/2" F	92.0 mm
3/4"	5550-02-12	5550-03-12	25.0	G 3/4" F	108.0 mm
1"	5550-02-16	5550-03-16	23.0	G 1" F	124.0 mm



Dust cover for male



Dust cover for female

5550

Dust cover

Yellow
ISO 7241-1A

PRODUCT GROUP 520



5550

Spare part kit


ISO 7241-1A

PRODUCT GROUP 520

Dim.	Male	Female	Material
1/4"	5551-04-04	5550-05-04	PVC
3/8"	5550-04-06	5550-05-06	PVC
1/2"	5550-04-08	5550-05-08	PVC
3/4"	5551-04-12	5550-05-12	PVC
1"	5551-04-16	5550-05-16	PVC

Dim.	Part number spare part kit
1/4"	5550-08-04
3/8"	5550-08-06
1/2"	5550-08-08
3/4"	5550-08-12
1"	5550-08-16





Interchangeable with Cejn 525, TEMA T-series quick release fitting standard model, without valve and with pressure eliminator/AISI 316.

**5552
HS QRT**

PRODUCT GROUP 526

Dim.	Male	Female	PN MPa	Thread	Length
T-SERIES					
1/8"	5552-02-02	5552-03-02	20,0	G 1/8" F	59,0 mm
1/4"	5552-02-04	5552-03-04	45,0	G 1/4" F	81,0 mm
3/8"	5552-02-06	5552-03-06	35,0	G 3/8" F	74,0 mm
1/2"	5552-02-08	5552-03-08	30,0	G 1/2" F	82,0 mm
3/4"	5552-02-12	5552-03-12	28,0	G 3/4" F	91,0 mm
1"	5552-02-16	5552-03-16	25,0	G 1" F	108,0 mm
T-SERIES WITHOUT VALVE					
1/4"	5552-09-04	5552-10-04	45,0	G 1/4" F	81,0 mm
3/8"	5552-09-06	5552-10-06	35,0	G 3/8" F	74,0 mm
1/2"	5552-09-08	5552-10-08	30,0	G 1/2" F	82,0 mm
3/4"	5552-09-12	5552-10-12	28,0	G 3/4" F	91,0 mm
1"	5552-09-16	5552-10-16	25,0	G 1" F	108,0 mm
T-SERIES WITH ELIMINATOR					
3/8"	5552-22-06	5552-23-06	35,0	G 3/8" F	74,0 mm
1/2"	5552-22-08	5552-23-08	30,0	G 1/2" F	82,0 mm
3/4"	5552-22-12	5552-23-12	28,0	G 3/4" F	91,0 mm
1"	5552-22-16	5552-23-16	25,0	G 1" F	108,0 mm
T-SERIES AISI 316					
1/4"	5552-02-04S	5552-03-04S	45,0	G 1/4" F	81,0 mm
3/8"	5552-02-06S	5552-03-06S	35,0	G 3/8" F	74,0 mm
1/2"	5552-02-08S	5552-03-08S	30,0	G 1/2" F	82,0 mm
3/4"	5552-02-12S	5552-03-12S	28,0	G 3/4" F	91,0 mm
1"	5552-02-16S	5552-03-16S	25,0	G 1" F	108,0 mm

**5552
Dust cover**
HS T-series

Dust cover for male
Dust cover for female

PRODUCT GROUP 526

Dim.	Male	Female
1/8"	5552-04-02	5552-05-02
1/4"	5552-04-04	5552-05-04
3/8"	5552-04-06	5552-05-06
1/2"	5552-04-08	5552-05-08
3/4"	5552-04-12	5552-05-12
1"	5552-04-16	5552-05-16

**5552
Spare part kit**
HS T-series
Nitrile

PRODUCT GROUP 526

Dim.	Part number spare part kit
1/8"	5552-07-02
1/4"	5552-07-04
3/8"	5552-07-06
1/2"	5552-07-08
3/4"	5552-07-12
1"	5552-07-16

**5Txx
Grease nipple**
T-series


PRODUCT GROUP 523

Dim.	Part number	Tema description	Type
3/8"	5TGR 3	T GR 3	Grease nipple
1/2"	5TGR 5	T GR 5	Grease nipple
3/4"	5TGR 7	T GR 7	Grease nipple
1"	5TGR 10	T GR 10	Grease nipple

**5552
Spare part kit**
HS T-series
Viton

PRODUCT GROUP 526

Dim.	Part number spare part kit
1/8"	5552-07-02V
1/4"	5552-07-04V
3/8"	5552-07-06V
1/2"	5552-07-08V
3/4"	5552-07-12V
1"	5552-07-16V
1 1/2"	5552-07-24V
2"	5552-07-32V



Drip-free quick release fitting. Interchangeable with DNP, Faster, Holmbury, CejnX65 and TEMA F.


5552

HS QR


ISO 16028

PRODUCT GROUP 526


Dim.	Male	Female	PN MPa	Thread
F SERIES				
1/4"	5552-42-04	5552-43-04	31,5	G 1/4" F
3/8"	5552-42-06	5552-43-06	25,0	G 3/8" F
3/8"	5552-42-07	5552-43-07	25,0	G 1/2" F
1/2"	5552-42-08	5552-43-08	25,0	G 1/2" F
1/2"	5552-42-09	5552-43-09	25,0	G 3/4" F
5/8"	5552-42-10	5552-43-10	25,0	G 3/4" F
3/4"	5552-42-12	5552-43-12	25,0	G 3/4" F
3/4"	5552-42-13	5552-43-13	25,0	G 1" F
1"	-	5552-43-16	25,0	G 1" F
1"	-	5552-43-17	25,0	G 1 1/4" F
F SERIES WITH VITON SEAL				
1/4"	5552-42-04V	5552-43-04V	31,5	G 1/4" F
3/8"	5552-42-06V	5552-43-06V	25,0	G 3/8" F
3/8"	5552-42-07V	5552-43-07V	25,0	G 1/2" F
1/2"	5552-42-08V	5552-43-08V	25,0	G 1/2" F
1/2"	5552-42-09V	5552-43-09V	25,0	G 3/4" F
5/8"	5552-42-10V	5552-43-10V	25,0	G 3/4" F
3/4"	5552-42-12V	5552-43-12V	25,0	G 3/4" F
3/4"	5552-42-13V	5552-43-13V	25,0	G 1" F
1"	5552-42-16V	5552-43-16V	25,0	G 1" F
F SERIES AISI 316				
1/4"	5552-42-04S	5552-43-04S	31,5	G 1/4" F
3/8"	5552-42-06S	5552-43-06S	25,0	G 3/8" F
3/8"	5552-42-07S	5552-43-07S	25,0	G 1/2" F
1/2"	5552-42-08S	5552-43-08S	25,0	G 1/2" F
1/2"	5552-42-09S	5552-43-09S	25,0	G 3/4" F
5/8"	5552-42-10S	5552-43-10S	25,0	G 3/4" F
3/4"	5552-42-12S	5552-43-12S	25,0	G 3/4" F
3/4"	5552-42-13S	5552-43-13S	25,0	G 1" F
F SERIES WITH ELIMINATOR				
1/4"	5552-46-04		50,0	G 1/4" F
3/8"	5552-46-06		40,0	G 3/8" F
3/8"	5552-46-07		40,0	G 1/2" F
1/2"	5552-46-08		40,0	G 1/2" F
1/2"	5552-46-09		40,0	G 3/4" F
5/8"	5552-46-10		35,0	G 3/4" F
3/4"	5552-46-12		35,0	G 3/4" F
3/4"	5552-46-13		35,0	G 1 1/4" F
1"	5552-46-16		35,0	G 1" F
1"	5552-46-17		35,0	G 1 1/4" F

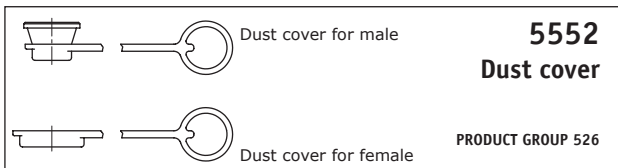

Dim.	Cover for male	Cover for female
1/4"	5552-44-04	5552-45-04
3/8"	5552-44-06	5552-45-06
1/2"	5552-44-08	5552-45-08
5/8"	5552-44-10	5552-45-10
3/4"	5552-44-12	5552-45-12
1"	5552-44-16	5552-45-16

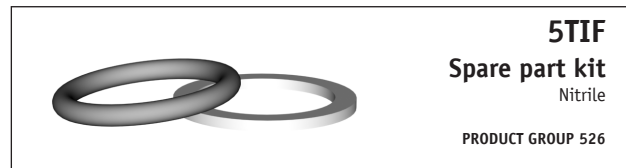

Dim.	Part number spare part kit
1/4"	5552-47-04
3/8"	5552-47-06
1/2"	5552-47-08
5/8"	5552-47-10
3/4"	5552-47-12
1"	5552-47-16




Standard fitting for normal hydraulic applications within industries and agriculture.

Dim. 1/2" is interchangeable with all ISO 7241-1 A series fittings.

5558
NV

ISO 7241-1A
PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Length
1/4"	5558-02-04	5558-03-04	35,0	G 1/4" F	66,0 mm
3/8"	5558-02-06	5558-03-06	30,0	G 3/8" F	78,0 mm
1/2"	5558-02-08	5558-03-08	30,0	G 1/2" F	88,0 mm
3/4"	5558-02-12	5558-03-12	25,0	G 3/4" F	107,0 mm
1"	5558-02-16	5558-03-16	23,0	G 1" F	132,0 mm
1 1/4"	5558-02-20	5558-03-20	22,0	G 1 1/4" F	146,0 mm
1 1/2"	5558-02-24	5558-03-24	18,0	G 1 1/2" F	166,0 mm
2"	5558-02-32	5558-03-32	13,0	G 2" F	200,0 mm



Panel mounted Push-Pull quick release fitting, which means that the hose is protected in case of an accidental disconnection. Used with a male part according to ISO 7241-1 A series.

5558
2NV/PV

ISO 7241-1A
PRODUCT GROUP 520


Dim.	Male	Female	PN MPa	Thread
1/2"	5550-02-08	5558-07-08	26,0	G 1/2" IF



5558
NV

Spare part kit
ISO 7241-1A

PRODUCT GROUP 520




5558-14/15
Faster NV, protection

Plastic (1/4"-3/4") / Metal (1"-2")

PRODUCT GROUP 520

Dim.	Part number spare part kit
1/4"	5558-16-04
3/8"	5558-16-06
1/2"	5558-16-08
3/4"	5558-16-12
1"	5558-16-16
1 1/4"	5558-16-20
1 1/2"	5558-16-24
2"	5558-16-32

Dim.	Cover for male	Cover for female
1/4"	5558-14-04	5558-15-04
3/8"	5558-14-06	5558-15-06
1/2"	5558-14-08	5558-15-08
3/4"	5558-14-12	5558-15-12
1"	5558-14-16	5558-15-16
1 1/4"	5558-14-20	5558-15-20
1 1/2"	5558-14-24	5558-15-24
2"	5558-14-32	5558-15-32




Drip-free quick release fitting for industrial and mobile applications.

5559
Bruning NS

PRODUCT GROUP 520


Dim.	Male	Female	PN MPa	Thread	Length
3/8"	5559-12-06	5559-13-06	17,5	G 3/8" F	73,0 mm
1/2"	5559-12-08	5559-13-08	17,5	G 1/2" F	95,0 mm
3/4"	5559-12-12	5559-13-12	17,5	G 3/4" F	101,0 mm
1"	5559-12-16	5559-13-16	17,5	G 1" F	115,0 mm



5559
Bruning, protection

PRODUCT GROUP 520


Dim.	Part number
3/8"	5559-14-06
1/2"	5559-14-08
3/4"	5559-14-12
1"	5559-14-16




Quick release fitting with dimensions and performance equivalent to ISO 7241-1 B series. Suitable for industrial and mobile hydraulic applications. Interchangeable with other fittings manufactured according to ISO7241-1 B series.

5553
Hansen HK
 ISO 7241-1B
 PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Length
1/8"	5553-02-02	5553-03-02	27.5	G 1/8" F	60.0 mm
1/4"	5553-02-04	5553-03-04	25.5	G 1/4" F	71.0 mm
3/8"	5553-02-06	5553-03-06	25.5	G 3/8" F	81.0 mm
1/2"	5553-02-08	5553-03-08	34.5	G 1/2" F	91.0 mm
3/4"	5553-02-12	5553-03-12	27.5	G 3/4" F	108.0 mm
1"	5553-02-16	5553-03-16	27.5	G 1" F	136.0 mm




5558
Dust cover
 Red
 ISO-B
 PRODUCT GROUP 520



5553
Spare part kit
 ISO-B
 PRODUCT GROUP 520

Dim.	Cover for male	Cover for female
1/4"	5558-34-04	5558-35-04
3/8"	5558-34-06	5558-35-06
1/2"	5558-34-08	5558-35-08
3/4"	5558-34-12	5558-35-12
1"	5558-34-16	5558-35-16


Dim.	O-ring	T-ring
1/8"	5553-06-02	5553-07-02
1/4"	5553-06-04	5553-07-04
3/8"	5553-06-06	5553-07-06
1/2"	5553-06-08N	5553-07-08N
3/4"	5553-06-12N	5553-07-12N
1"	5553-06-16N	5553-07-16N




Quick release fitting with dimensions and performance equivalent to ISO 7241-1 B series. Suitable for industrial and mobile hydraulic applications. Interchangeable with other fittings manufactured according to ISO7241-1 B series.

5558
ISO B
 ISO 7241-1B
 PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Length
1/8"	5558-32-02	5558-33-02	40,0	G 1/8" F	63,0 mm
1/4"	5558-32-04	5558-33-04	35,0	G 1/4" F	70,5 mm
3/8"	5558-32-06	5558-33-06	32,0	G 3/8" F	78,0 mm
1/2"	5558-32-08	5558-33-08	30,0	G 1/2" F	88,0 mm
3/4"	5558-32-12	5558-33-12	25,0	G 3/4" F	110,0 mm
1"	5558-32-16	5558-33-16	23,0	G 1" F	132,0 mm



5558
Dust cover
 Red
 ISO-B
 PRODUCT GROUP 520

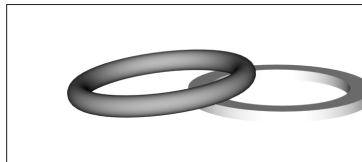

5558-59
Spare part kit
 ISO-B
 PRODUCT GROUP 520

Dim.	Cover for male	Cover for female
1/4"	5558-34-04	5558-35-04
3/8"	5558-34-06	5558-35-06
1/2"	5558-34-08	5558-35-08
3/4"	5558-34-12	5558-35-12
1"	5558-34-16	5558-35-16

Dim.	Part number
1/8"	5558-59-02
1/4"	5558-59-04
3/8"	5558-59-06
1/2"	5558-59-08
3/4"	5558-59-12
1"	5558-59-16



5TIF
Grease nipple

PRODUCT GROUP 505


Dim.	Part number	Serie
3/8"	5TGRIF38	QRF
1/2"	5TGRIF50	QRF
5/8"	5TRGIF63	QRF
3/4"	5TGRIF75	QRF
1"	5TGRIF100	QRF



5Txx
Decompression valve
For assembling in hydraulic systems in order to remove static pressure.

PRODUCT GROUP 523

Dimension	Part number	Tema description
3/8"	5TTA38	TA38
1/2"	5TTA50	TA50
3/4"	5TTA75	TA75
1"	5TTA100	TA100

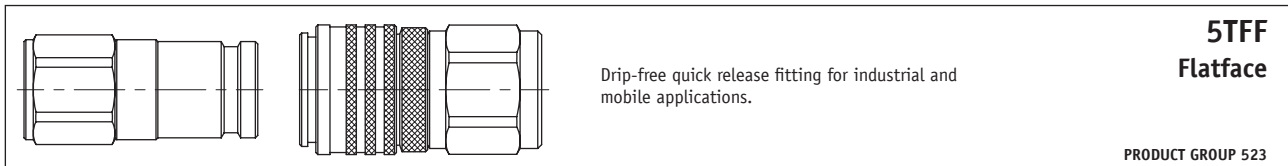

Drip-free quick release fitting for industrial and mobile applications.

5TFF
Flatface

PRODUCT GROUP 523


Dim.	Male	Tema description	Female	Tema description	PN MPa	Thread	Length
------	------	------------------	--------	------------------	--------	--------	--------

FF SERIES

1/2"	5TFF5020	FF5020	5TFF5010	FF5010	40.0	G 1/2" F	144.0 mm
1/2"	5TFF5020-75	FF5020-75	5TFF5010-75	FF5010-75	40.0	G 3/4" F	144.0 mm
3/4"	5TFF7520	FF7520	5TFF7510	FF7510	40.0	G 3/4" F	169.0 mm
3/4"	5TFF7520-100	FF7520-100	5TFF7510-100	FF7510-100	40.0	G 1" F	169.0 mm
1"	5TFF10020	FF10020	5TFF10010	FF10010	30.0	G 1" F	230.0 mm
1"	5TFF10020-125	FF10020-125	5TFF10010-125	FF10010-125	30.0	G 1 1/4" F	230.0 mm
1"	5TFF10020-150	FF10020-150	5TFF10010-150	FF10010-150	30.0	G 1 1/2" F	230.0 mm

FF SERIES WITH ELIMINATOR


1/2"	5TFF5021	FF5021			40.0	G 1/2" F	144.0 mm
1/2"	5TFF5021-75	FF5021-75			40.0	G 3/4" F	144.0 mm
3/4"	5TFF7521	FF7521			40.0	G 3/4" F	169.0 mm
3/4"	5TFF7521-100	FF7521-100			40.0	G 1" F	169.0 mm
1"	5TFF10021	FF10021			30.0	G 1" F	230.0 mm
1"	5TFF10021-125	FF10021-125			30.0	G 1 1/4" F	230.0 mm
1"	5TFF10021-150	FF10021-150			30.0	G 1 1/2" F	230.0 mm

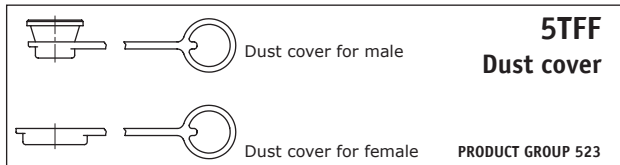

5TFF
Dust cover

PRODUCT GROUP 523


Dim.	Male	Tema descr.	Female	Tema descr.
1/2"	5TFF5026	FF5026	5TFF5016	FF5016
3/4"	5TFF7526	FF7526	5TFF7516	FF7516
1"	5TFF10026	FF10026	5TFF10016	FF10016

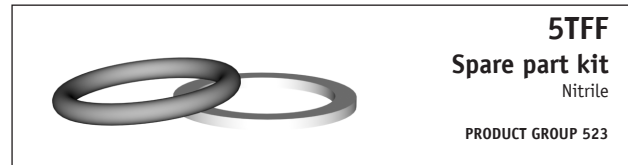

5TFF
Spare part kit
Nitrile

PRODUCT GROUP 523


Dim.	Part number	Tema description
1/2"	5TFF5000 PPU	FF5000 PPU
3/4"	5TFF7500 PPU	FF7500 PPU
1"	5TFF10000 PPU	FF10000 PPU

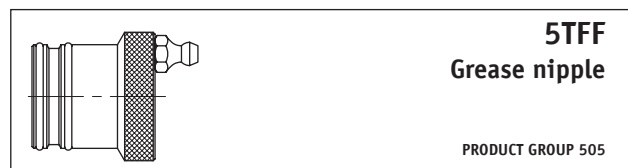

5TFF
Grease nipple

PRODUCT GROUP 505

Dim.	Part number	Serie
1/2"	5TGRF5	FF
3/4"	5TGRF7	FF
1"	5TGRF10	FF



Drip-free threaded quick release fitting especially suited for systems with high pulsating pressures. The fitting can be assembled even when it is put into pressure. The threading also prevents accidental disconnection.

5558
3FFV

PRODUCT GROUP 520


Dim.	Male	Female	PN MPa	Thread	Length
3/8"	5558-48-06	5558-49-06	30,0	G 3/8" F	134,9 mm
1/2"	5558-48-08	5558-49-08	30,0	G 1/2" F	151,5 mm
3/4"	5558-48-12	5558-49-12	30,0	G 3/4" F	181,5 mm
1"	5558-48-16	5558-49-16	40,0	G 1" F	196,7 mm
1 1/4"	5558-48-20	5558-49-20	40,0	G 1 1/4" F	201,7 mm
1 1/2"	5558-48-24	5558-49-24	40,0	G 1 1/2" F	229,4 mm



5558
3FFV Spare part kit
Nitrile

PRODUCT GROUP 520

Dim.	Male kit	Female kit
3/8"	5558-44-06M	5558-44-06F
1/2"	5558-44-08M	5558-44-08F
3/4"	5558-44-12M	5558-44-12F
1"	5558-44-16M	5558-44-16F
1 1/2"	5558-44-24M	5558-44-24F

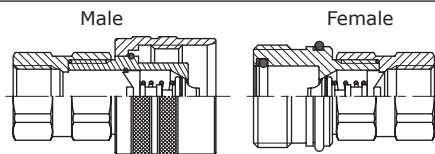


CVV safety factor 3:1. Interchangeable with Argus.

5558
CVV

PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Other info
04	5558-80-05	5558-81-05	48,0	G 1/4" F	
06	5558-80-07	5558-81-07	38,0	G 3/8" F	
08	5558-80-09V	5558-81-09V	34,0	G 1/2" F	Viton
12	5558-80-11	5558-81-11	37,0	G 3/4" F	
16	5558-80-12V	5558-81-12V	33,0	G 3/4" F	Viton
16	5558-80-17	5558-81-17	33,0	G 1" F	
24	5558-80-24	5558-81-24	37,0	G 1 1/4" F	
04	5558-80-0490		48,0	M16x1,5 M	8S
04		5558-81-04-90	48,0	M16x1,5 M	8S, Bulkhead
16	5558-80-19	5558-81-19	33,0	M36x2 M	25S
16	5558-80-36	5558-81-36	33,0	M36x2 M	25S, Bulkhead
16		5558-81-51	33,0	M36x2 M	28L
16		5558-81-42-90	33,0	M42x2 M	30S
24		5558-81-20	37,0	M42x2 M	30S
24	5558-80-20	5558-81-21	37,0	M42x2 M	30S, Viton
24		5558-81-20-90V	37,0	M42x2 M	30S, Viton, Bulkhead
24	5558-80-22	5558-81-22	37,0	M52x2 M	38S, Viton



5558
CVV Protection
Red

PRODUCT GROUP 520


Dim.	Cover for male	Cover for female
04	5558-86-04	5558-87-04
06	5558-86-06	5558-87-06
08	5558-86-08	5558-87-08
12	5558-86-12	5558-87-12
16	5558-86-16	5558-87-16
24	5558-86-24	5558-87-24



5558
CVV Spare part kit
Viton

PRODUCT GROUP 520

Dim.	Part number
08	5558-99-47
12	5558-98-97
16	5558-99-48
24	5558-99-45




Threaded fitting for high pulsating pressure so-called hammer hydraulics.

Material: Steel QPC/yellow
Packing: Nitrile, -40° – +100°C


5S80
Stucchi VP

PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread
1/4" (07)	5S801900001	5S801900000	60,0	G 1/4" F
3/8" (09)	5S807300003	5S807300002	55,0	G 3/8" F
3/8" (09)	5S807300005	5S807300004	55,0	G 1/2" F
1/2" (13)	5S807300007	5S807300006	55,0	G 1/2" F
1/2" (13)	5S807300009	5S807300008	55,0	G 3/4" F
3/4" (15)	5S807300010	5S807300011	55,0	G 3/4" F
1" (17)	5S807300013	5S807300012	50,0	G1" F
1 1/4" (21)	5S807300015	5S807300014	47,0	G 1 1/4" F
1 1/2" (30)	5S807300017	5S807300016	40,0	G 1 1/2" F



Cover for male




Cover for female

5S81
Stucchi VP, protection

PRODUCT GROUP 520

Dim.	Cover for male	Cover for female
1/4" (07)	5S815300051	5S815300050
3/8" (09)	5S815300053	5S815300052
1/2" (13)	5S815300055	5S815300054
3/4" (15)	5S815300057	5S815300056
1" (17)	5S815300059	5S815300058
1 1/4" (21)	5S815300061	5S815300060
1 1/2" (30)	5S815300063	5S815300062

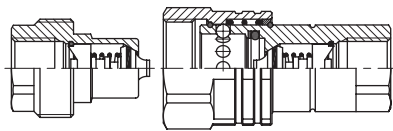


Threaded quick release fitting for standardised hydraulic applications. Thanks to the threads, it is possible to assemble the valve even when there is some pressure left in the system. The threading also prevents accidental disconnection.

5558
VV

PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread	Length
1/4"	5558-22-04	5558-23-04	35,0	G 1/4" F	66,0 mm
3/8"	5558-22-06	5558-23-06	30,0	G 3/8" F	78,0 mm
1/2"	5558-22-08	5558-23-08	30,0	G 1/2" F	88,0 mm
3/4"	5558-22-12	5558-23-12	25,0	G 3/4" F	110,0 mm
1"	5558-22-16	5558-23-16	23,0	G 1" F	132,0 mm



5558
VV, protection
Aluminium

PRODUCT GROUP 520


Dim.	Cover for male	Cover for female
1/4"	5558-38-04	5558-39-04
3/8"	5558-38-06	5558-39-06
1/2"	5558-38-08	5558-39-08
3/4"	5558-38-12	5558-39-12
1"	5558-38-16	5558-39-16



5558-24
Spare part kit

PRODUCT GROUP 520

Dim.	Part number
1/4"	5558-24-04
3/8"	5558-24-06
1/2"	5558-24-08
3/4"	5558-24-12
1"	5558-24-16




Quick release fitting with NPT-thread. Threaded quick release fitting possible to connect during very high static pressures. Used for e.g. hydraulic jacks.

5558
PVVM

PRODUCT GROUP 520


Dim.	Male	Thread	Female	Thread	PN MPa	Length
1/4"	5558-64-04	1/4" NPT F	5558-65-04	1/4" NPT M	35,0	74,0 mm
3/8"	5558-64-06	3/8" NPT F	5558-65-06	3/8" NPT M	30,0	82,0 mm



5558
PVVM Protection
Aluminium

PRODUCT GROUP 520


Dim.	Cover for male	Cover for female
1/4"	5558-66-04	5558-67-04
3/8"	5558-66-06	5558-67-06



5558
PVVM Spare part kit
Nitrile

PRODUCT GROUP 520

Dim.	Part number
1/4"	5558-69-04
3/8"	5558-69-06



Quick release fitting for hydraulic brakes.
According to ISO 5676.


5558

VF

ISO 5676

PRODUCT GROUP 520

Dim.	Male	Female	PN MPa	Thread
3/8"	5558-68-26		22	Male M16 x 1,5 10L bulkhead
3/8"	5558-68-51		22	Male M18 x 1,5 12L bulkhead
3/8"	5558-68-27		22	Male M22 x 1,5 15L bulkhead
3/8"	5558-68-08		22	G 1/2" M
3/8"		5558-69-08	22	G 1/2" F
3/8"		5558-68-25	22	Female M18 x 1,5



Drip-free quick release fitting for very high pressures.
Especially suited for e.g. hydraulic pumps, lever jacks and salvage equipment. Bore: 3 mm.


5C10115

CEJN 115

PRODUCT GROUP 524

Dim.	Male	Female	PN MPa	Thread	Length
1/4"	5C10 115 6202	5C10 115 1202	100,0	G 1/4" F	75,0 mm
1/4"		5C10 115 1222*	100,0	G 1/4" F	75,0 mm
1/4"	5C10 115 6402	5C10 115 1402	100,0	NPT 1/4" F	75,0 mm
3/8"	5C10 115 6204	5C10 115 1204	100,0	G 3/8" F	79,0 mm
3/8"	5C10 115 6154		100,0	R 3/8" M	79,0 mm
3/8"		5C10 115 1254	100,0	G 3/8" M	79,0 mm
3/8"	5C10 115 6404	5C10 115 1404	100,0	NPT 3/8" F	79,0 mm
3/8"	5C10 115 6454	5C10 115 1454	100,0	NPT 3/8" M	79,0 mm

*) with security lock



Cejn 116 is interchangeable with TEMA THP 1000

5C10116


CEJN 116

PRODUCT GROUP 524

Dim.	Male	Female	PN MPa	Thread	Length
1/4"	5C10 116 6202	5C10 116 1202	150,0	G 1/4" IF	75,0 mm
1/4"	5C10 116 6202	5C10 116 1222*	150,0	G 1/4" IF	79,0 mm
1/4"	5C10 116 6241**	5C10 116 1246**	150,0	G 1/4" IF	79,0 mm
1/4"	5C10 116 6402		150,0	NPT 1/4" IF	79,0 mm

*) with security lock

***) with security lock, stainless steel and nickel-plated locking sleeve





5C10125


CEJN 125

PRODUCT GROUP 524

Dim.	Male	Female	PN MPa	Thread
1/4"	5C10 125 6202	5C10 125 1202	200,0	G 1/4" F


OUR WIDE RANGE OF MULTICONNECT ARE FROM THE LEADING MANUFACTURERS

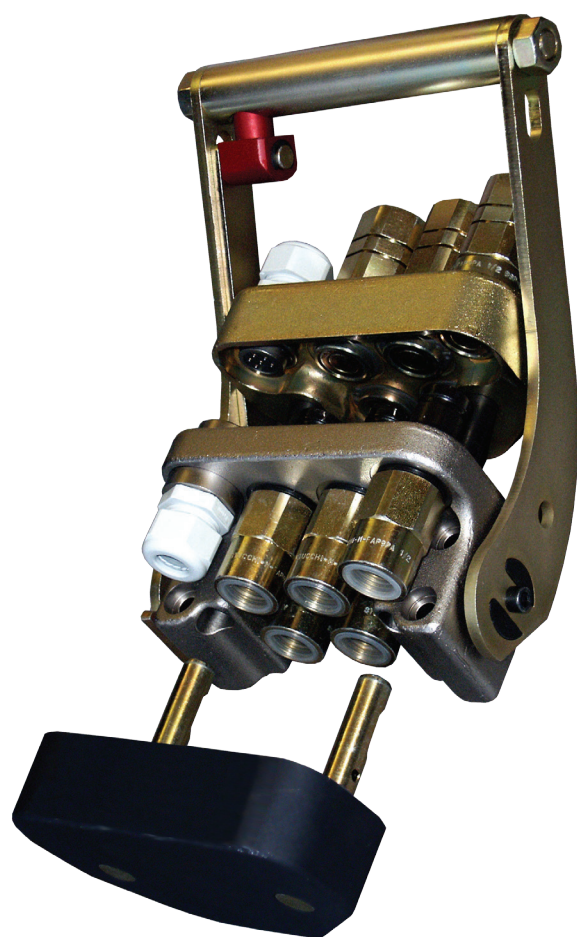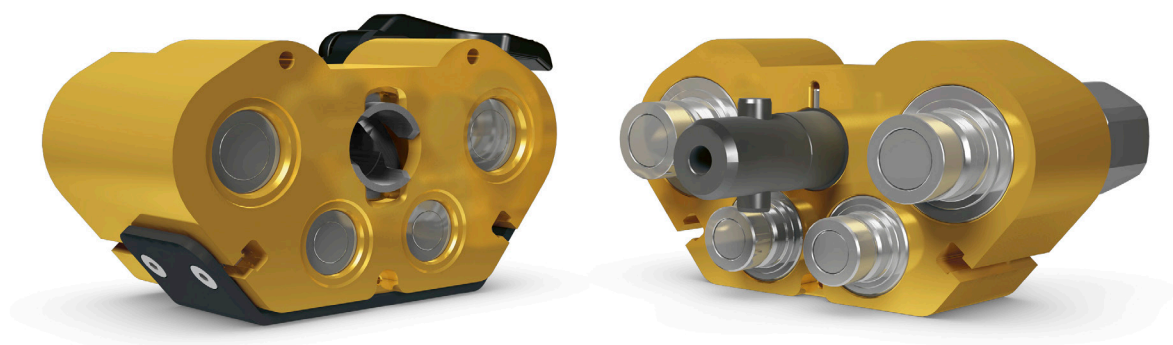




5C10 320
CEJN series 320
Compressed air fitting
Bore 7,4 mm PN = 3,5 MPa
PRODUCT GROUP 524

Part number	Cejn descr.	Type	Connection
5C10 320 1002	10 320 1002	Female	Hose 6 mm
5C10 320 1003	10 320 1003	Female	Hose 8 mm
5C10 320 1004	10 320 1004	Female	Hose 10 mm
5C10 320 1005	10 320 1005	Female	Hose 13 mm
5C10 320 1152	10 320 1152	Female	R 1/4" M
5C10 320 1154	10 320 1154	Female	R 3/8" M
5C10 320 1155	10 320 1155	Female	R 1/2" M
5C10 320 1202	10 320 1202	Female	G 1/4" F
5C10 320 1204	10 320 1204	Female	G 3/8" F
5C10 320 1205	10 320 1205	Female	G 1/2" F
5C10 320 5001	10 320 5001	Male	Hose 4 mm
5C10 320 5002	10 320 5002	Male	Hose 6 mm
5C10 320 5003	10 320 5003	Male	Hose 8 mm
5C10 320 5004	10 320 5004	Male	Hose 10 mm
5C10 320 5005	10 320 5005	Male	Hose 13 mm
5C10 320 5151	10 320 5151	Male	R 1/8" M
5C10 320 5152	10 320 5152	Male	R 1/4" M
5C10 320 5154	10 320 5154	Male	R 3/8" M
5C10 320 5155	10 320 5155	Male	R 1/2" M
5C10 320 5201	10 320 5201	Male	G 1/8" F
5C10 320 5202	10 320 5202	Male	G 1/4" F
5C10 320 5204	10 320 5204	Male	G 3/8" F
5C10 320 5205	10 320 5205	Male	G 1/2" F
5C10 320 8002	10 320 8002	Anti-hose whip nipples	1/4" SI.
5C10 320 8003	10 320 8003	Anti-hose whip nipples	5/16" SI.
5C10 320 8004	10 320 8004	Anti-hose whip nipples	3/8" SI.
5C10 320 8005	10 320 8005	Anti-hose whip nipples	1/2" SI.



5C10 320
CEJN series 320
Safety fitting
PRODUCT GROUP 524


Part number	Cejn descr.	Type	Connection
5C 10 320 3152	10 320 3152	Female	R 1/4" M
5C 10 320 3154	10 320 3154	Female	R 3/8" M
5C 10 320 3155	10 320 3155	Female	R 1/2" M
5C 10 320 3202	10 320 3202	Female	G 1/4" F
5C 10 320 3204	10 320 3204	Female	G 3/8" F
5C 10 320 3205	10 320 3205	Female	G 1/2" F
5C 10 320 3002	10 320 3002	Female	Hose 6 mm
5C 10 320 3003	10 320 3003	Female	Hose 8 mm
5C 10 320 3004	10 320 3004	Female	Hose 10 mm
5C 10 320 3005	10 320 3005	Female	Hose 13 mm



5C10 410
CEJN series 410
Compressed air fitting
PRODUCT GROUP 524

Part number	Cejn descr.	Type	Connection
5C 10 410 1003	10 410 1003	Female	Hose 8 mm
5C 10 410 1004	10 410 1004	Female	Hose 10 mm
5C 10 410 1005	10 410 1005	Female	Hose 13 mm
5C 10 410 1006	10 410 1006	Female	Hose 16 mm
5C 10 410 1007	10 410 1007	Female	Hose 19 mm
5C 10 410 1154	10 410 1154	Female	R 3/8" M
5C 10 410 1155	10 410 1155	Female	R 1/2" M
5C 10 410 1157	10 410 1157	Female	R 3/4" M
5C 10 410 1204	10 410 1204	Female	G 3/8" F
5C 10 410 1205	10 410 1205	Female	G 1/2" F
5C 10 410 1207	10 410 1207	Female	G 3/4" F
5C 10 410 5002	10 410 5002	Female	Hose 6 mm
5C 10 410 5003	10 410 5003	Female	Hose 8 mm
5C 10 410 5004	10 410 5004	Female	Hose 10 mm
5C 10 410 5005	10 410 5005	Female	Hose 13 mm
5C 10 410 5006	10 410 5006	Female	Hose 16 mm
5C 10 410 5007	10 410 5007	Female	Hose 19 mm
5C 10 410 5152	10 410 5152	Female	R 1/4" M
5C 10 410 5154	10 410 5154	Female	R 3/8" M
5C 10 410 5155	10 410 5155	Female	R 1/2" M
5C 10 410 5157	10 410 5157	Female	R 3/4" M
5C 10 410 5202	10 410 5202	Female	G 1/4" F
5C 10 410 5204	10 410 5204	Female	G 3/8" F
5C 10 410 5205	10 410 5205	Female	G 1/2" F
5C 10 410 5207	10 410 5207	Female	G 3/4" F
5C 10 410 8004	10 410 8004	Anti-hose whip nipples	SI 3/8"
5C 10 410 8005	10 410 8005	Anti-hose whip nipples	SI 1/2"
5C 10 410 8006	10 410 8006	Anti-hose whip nipples	SI 5/8"
5C 10 410 8007	10 410 8007	Anti-hose whip nipples	SI 3/4"


Interchangeable with Tema 1700, Cejn 410, Rectus 27 and Luna 27.



5C10 410
CEJN series 410r
Safety fitting
PRODUCT GROUP 524

Part number	Cejn descr.	Type	Connection
5C 10 410 3155	10 410 3155	Female	R 1/2" M
5C 10 410 3157	10 410 3157	Female	R 3/4" M
5C 10 410 3204	10 410 3204	Female	R 3/8" F
5C 10 410 3205	10 410 3205	Female	R 1/2" F
5C 10 410 3005	10 410 3005	Female	Hose 13 mm

NB! The 1100 series is not connectable with the 1100N series




Tema 1100

Compressed air fitting
Bore = 5,5 mm PN = 3 MPa

PRODUCT GROUP 523

Part number	Tema descr.	Type	Seal	Connection
5T1100	1100	Female	NBR	G 1/8" F
5T1100A	1100A	Female	NBR	G 1/4" M
5T1100V	1100V	Female	Viton	G 1/8" F
5T11110	11110	Male		G 1/8" M
5T11410	11410	Male		G 1/8" F
5T11005	11005	Male		Hose 5 mm
5T11006	11006	Male		Hose 6 mm
5T11310N	11310N	O-ring	NBR	
5T11310V	11310V	O-ring	Viton	

NB! The 1100 series is not connectable with the 1100N series




Tema 1100N

Compressed air fitting
Bore = 5,5 mm
M = Brassed,
chromium-plated PN = 3 MPa

PRODUCT GROUP 523

Part number	Tema descr.	Type	Seal	Connection
5T1100N	1100N	Female	NBR	G 1/8" F
5T1100NV	1100NV	Female	Viton	G 1/8" F
5T11410MEP	11410MEP	Male	NBR	G 1/8" F
5T11410MN	11410MN	Male	EPDM	G 1/8" F
5T11410MV	11410MV	Male	Viton	G 1/8" F
5T11310N	11310N	O-ring	NBR	
5T11310V	11310V	O-ring	Viton	

NB! The 1300 series is not connectable with 1300N series




Tema 1300 / 1300E

Compressed air fitting
Bore = 6,8 mm
PN = 3 MPa E= One-handed

PRODUCT GROUP 523


Part number	Tema descr.	Type	Seal	Connection
5T1300	1300	Female	NBR	G 1/4" F
5T1300A	1300A	Female	NBR	G 3/8" M
5T1300B	1300B	Female	NBR	G 3/8" F
5T1300E	1300E	Female	NBR	G 1/4" F
5T1300V	1300V	Female	Viton	G 1/4" F
5T1300EA	1300EA	Female	NBR	R 3/8" M
5T1300EB	1300EB	Female	NBR	G 3/8" F
5T1300EC	1300EC	Female	NBR	R 1/4" M
5T1300ED	1300ED	Female	NBR	R 1/2" M
5T1300EK06	1300EK06	Female	NBR	Hose 6 mm
5T1300EK08	1300EK08	Female	NBR	Hose 8 mm
5T1300EK10	1300EK10	Female	NBR	Hose 10 mm
5T1300EK12	1300EK12	Female	NBR	Hose 12 mm
5T13110	13110	Male		R 1/8" M
5T13210	13210	Male		G 1/4" M
5T13220	13220	Male		R 3/8" M
5T13230	13230	Male		R 1/2" M
5T13405	13405	Male		G 1/8" F
5T13410	13410	Male		G 1/4" F
5T13420	13420	Male		G 3/8" F
5T13430	13430	Male		G 1/2" F
5T13006	13006	Male		Hose 6 mm
5T13008	13008	Male		Hose 8 mm
5T13010	13010	Male		Hose 10 mm
5T13012	13012	Male		Hose 12 mm
5T13310 N	13310 N	Seal	NBR	





Tema 1600
Compressed air fitting
 Bore = 6,7 mm
 S = Safety nipple
 PN = 3 MPa
 PRODUCT GROUP 523


Part number	Tema descr.	Type	Connection
5T1600	1600	Female	G 1/4" F
5T1600A	1600A	Female	R 3/8" M
5T1600B	1600B	Female	G 3/8" F
5T1600C	1600C	Female	R 1/2" M
5T1600D	1600D	Female	R 1/4" M
5T1600F	1600F	Female	G 1/2" F
5T1600K06	1600K06	Female	Hose 6 mm
5T1600K08	1600K08	Female	Hose 8 mm
5T1600K10	1600K10	Female	Hose 10 mm
5T1600K12	1600K12	Female	Hose 12 mm
5T16110	16110	Male	R 1/8" M
5T16210	16210	Male	R 1/4" M
5T16220	16220	Male	R 3/8" M
5T16230	16230	Male	R 1/2" M
5T16405	16405	Male	G 1/8" F
5T16410	16410	Male	G 1/4" F
5T16420	16420	Male	G 3/8" F
5T16430	16430	Male	G 1/2" F
5T16410S	16410S	Male	G 1/4" F
5T16006	16006	Male	Hose 6 mm
5T16008	16008	Male	Hose 8 mm
5T16010	16010	Male	Hose 10 mm
5T16012	16012	Male	Hose 12 mm
5T13320	13320	Seal 1/4"	
5T18320	18320	Seal 3/8"	



Tema 1625
Compressed air fitting
 Bore = 6,7 mm
 With non-return valve connectable with TEMA 1600
 PN = 3 MPa
 PRODUCT GROUP 523


Part number	Tema descr.	Type	Connection
5T1625KAAK13S	1625KAAK13SPN	Female	G 1/4" M
5T1625KAAK17S	1625KAAK17SPN	Female	G 3/8" M
5T1625KAAK21S	1625KAAK21SPN	Female	G 1/2" M
5T1625KAIW13S	1625KAIW13SPN	Female	G 1/4" F
5T1625KAIW17S	1625KAIW17SPN	Female	G 3/8" F
5T1625KAIW21S	1625KAIW21SPN	Female	G 1/2" F
5T1625KATF06S	1625KATF06SPN	Female	Hose 1/4"
5T1625KATF08S	1625KATF08SPN	Female	Hose 5/16"
5T1625KATF10S	1625KATF10SPN	Female	Hose 3/8"
5T1625KATF13S	1625KATF13SPN	Female	Hose 1/2"

Interchangeable with 1600 series and 320 series.



Tema 1650
Compressed air fitting
 Connectable with Atlas Copco QIC 10 fittings
 PN = 3,5 MPa
 PRODUCT GROUP 523


Part number	Tema descr.	Type	Connection
5T1650D	1650D	Female	R 1/4" M
5T1650A	1650A	Female	R 3/8" M
5T1650C	1650C	Female	R 1/2" M
5T1650	1650	Female	G 1/4" F
5T1650B	1650B	Female	G 3/8" F
5T1650F	1650F	Female	G 1/2" F
5T1650K06	1650K06	Female	Slang 6 mm
5T1650K08	1650K08	Female	Slang 8 mm
5T1650K10	1650K10	Female	Slang 10 mm
5T1650K12	1650K12	Female	Slang 12 mm
5T165110	165110	Male	R 1/8" M
5T165210	165210	Male	R 1/4" M
5T165220	165220	Male	R 3/8" M
5T165230	165230	Male	R 1/8" M
5T165405	165405	Male	G 1/8" F
5T165410	165410	Male	G 1/4" F
5T165420	165420	Male	G 3/8" F
5T165430	165430	Male	G 1/2" F
5T165006	165006	Male	Hose 6 mm
5T165008	165008	Male	Hose 8 mm
5T165010	165010	Male	Hose 10 mm
5T165012	165012	Male	Hose 12 mm



Tema 1700
Compressed air fitting
 Connectable with Cejn 410
 PN = 3,0 MPa
 PRODUCT GROUP 523

Part number	Tema descr.	Type	Seal	Connection
5T1700	1700	Female	NBR	G 3/8" F
5T1700A	1700A	Female	NBR	R 1/2" M
5T1700B	1700B	Female	NBR	G 1/2" F
5T1700C	1700C	Female	NBR	G 3/4" F
5T1700D	1700D	Female	NBR	R 3/8" M
5T1700K10	1700K10	Female	NBR	Hose 10 mm
5T1700K12	1700K12	Female	NBR	Hose 12 mm
5T1700K16	1700K16	Female	NBR	Hose 16 mm
5T1700K19	1700K19	Female	NBR	Hose 19 mm
5T17110	17110	Male		R 1/4" M
5T17210	17210	Male		R 3/8" M
5T17220	17220	Male		R 1/2" M
5T17410	17410	Male		G 3/8" F
5T17420	17420	Male		G 1/2" F
5T17010	17010	Male		Hose 10 mm
5T17012	17012	Male		Hose 12 mm
5T17016	17016	Male		Hose 16 mm
5T17019	17019	Male		Hose 19 mm


Interchangeable with Cejn 410, Rectus 27 and Luna 27.



Tema 1750
Compressed air fitting
 Connectable with
 Atlas Copcos QIC 15 410 fittings
 PN = 3,5 MPa
PRODUCT GROUP 523

Part number	Tema descr.	Type	Connection
5T1750D	1750D	Female	R 1/4" M
5T1750A	1750A	Female	R 3/8" M
5T1750C	1750C	Female	R 1/2" M
5T1750B	1750B	Female	G 1/4" F
5T1750	1750	Female	G 3/8" F
5T1750F	1750F	Female	G 1/2" F
5T1750K08	1750K08	Female	Hose 8 mm
5T1750K10	1750K10	Female	Hose 10 mm
5T1750K12	1750K12	Female	Hose 12 mm
5T1750K16	1750K16	Female	Hose 16 mm
5T1750K19	1750K19	Female	Hose 19 mm
5T175110	175110	Male	R 1/4" M
5T175210	175210	Male	R 3/8" M
5T175220	175220	Male	R 1/2" M
5T175410	175410	Male	G 1/4" F
5T175420	175420	Male	G 3/3" F
5T175430	175430	Male	G 1/2" F
5T175006	175006	Male	Hose 6 mm
5T175010	175010	Male	Hose 10 mm
5T175012	175012	Male	Hose 12 mm
5T175016	175016	Male	Hose 16 mm


Interchangeable with Atlas Copco QIC 15.



Tema 1800/1800E
Compressed air fitting^{Bore}
 10,4 mm
 E = One-handed
 S = Safety nipple
 PN = 3 MPa
PRODUCT GROUP 523

Part number	Tema descr.	Type	Seal	Connection
5T1800	1800	Female	NBR	G 3/8" F
5T1800A	1800A	Female	NBR	G 1/2" M
5T1800B	1800B	Female	NBR	G 1/2" F
5T1800C	1800C	Female	NBR	G 3/4" F
5T1800V	1800V	Female	Viton	G 3/8" F
5T1800BV	1800BV	Female	Viton	G 1/2" F
5T1800AV	1800AV	Female	Viton	G 1/2" M
5T1800E	1800E	Female	NBR	G 3/8" F
5T1800EA	1800EA	Female	NBR	R 1/2" M
5T1800EB	1800EB	Female	NBR	G 1/2" F
5T1800EC	1800EC	Female	NBR	G 3/4" F
5T1800ED	1800ED	Female	NBR	R 3/8" M
5T1800EF	1800EF	Female	NBR	R 3/4" M
5T1800EK10	1800EK10	Female	NBR	Hose 10 mm
5T1800EK12	1800EK12	Female	NBR	Hose 12 mm
5T1800EK16	1800EK16	Female	NBR	Hose 16 mm
5T1800EK19	1800EK19	Female	NBR	Hose 19 mm
5T18105	18105	Male		R 1/8" M
5T18110	18110	Male		G 1/4" M
5T18110A	18110A	Male		R 1/4" M
5T18210	18210	Male		G 3/8" M
5T18220	18220	Male		R 1/2" M
5T18230	18230	Male		R 3/4" M
5T18405	18405	Male		G 1/4" F
5T18410	18410	Male		G 3/8" F
5T18420	18420	Male		G 1/2" F
5T18006	18006	Male		Hose 6 mm
5T18008	18008	Male		Hose 8 mm
5T18010	18010	Male		Hose 10 mm
5T18012	18012	Male		Hose 12 mm
5T18016	18016	Male		Hose 16 mm
5T18019	18019	Male		Hose 19 mm
5T18410S	18410S	Male		G 3/8" F
5T18310N	18310N	Seal NBR		
5T18310V	18310V	Seal Viton		

NB! The 1800/1800E series is not interchangeable with 1800N-series.




Tema 1800N
Compressed air fitting
Bore 10,4 mm
E = One-handed, S = Steel, M = Brass
PN = 3 MPa
PRODUCT GROUP 523

Part number	Tema descr.	Type	Seal	Connection
5T1800N	1800N	Female	NBR	G 3/8" F
5T1800NB	1800NB	Female	NBR	G 1/2" F
5T1800NBA	1800NBA	Female	EPDM	G 1/2" F
5T1800NC	1800NC	Female	NBR	G 3/4" F
5T1800NV	1800NV	Female	Viton	G 3/8" F
5T1800NAV	1800NAV	Female	Viton	G 1/2" M
5T1800NBV	1800NBV	Female	Viton	G 1/2" F
5T1800NCV	1800NCV	Female	Viton	G 3/4" M
5T18410MN	18410MN	Male	NBR	G 3/8" F
5T18410STN	18410STN	Male	NBR	G 3/8" F
5T18410MNV	18410MNV	Male	Viton	G 3/8" F
5T18410STV	18410STV	Male	Viton	G 3/8" F
5T18310N	18310N	O-ring, NBR		
5T18310V	18310V	O-ring, Viton		


NB! The 1800N series is not interchangeable with the 1800/1800-series.

Female part free flow (without valve)



Tema 1800H
Water fitting
Bore 10,4 mm,
E = One-hand, S = Steel, M = Brass
PN = 3 MPa
PRODUCT GROUP 520


Part number	Tema descr.	Type	Seal	Connection
5T1800H	1800H	Female	NBR	G 3/8" F
5T1800HEP	1800HEP	Female	EPDM	G 3/8" F
5T1800HV	1800HV	Female	Viton	G 3/8" F
5T18105	18105	Male		R 1/8" M
5T18110	18110	Male		G 1/4" M
5T18110A	18110A	Male		R 1/4" M
5T18210	18210	Male		G 3/8" M
5T18210A	18210A	Male		R 3/8" M
5T18220	18220	Male		R 1/2" M
5T18230	18230	Male		R 3/4" M
5T18405	18405	Male		G 1/4" F
5T18410	18410	Male		G 3/8" F
5T18420	18420	Male		G 1/2" F
5T18310N	18310N	Seal, NBR		
5T18310V	18310V	Seal, Viton		



Tema 2100
Compressed air fitting
PN = 2 MPa

PRODUCT GROUP 523

Part number	Tema descr.	Type	Connection
5T2100	2100	Female	G 1" F
5T21019	21019	Male	Hose 19 mm
5T21025	21025	Male	Hose 25 mm
5T21032	21032	Male	Hose 32 mm
5T21210	21210	Male	G 1" M
5T21310N	21310N	O-ring Nitrile	



Tema
Hose nipple

PRODUCT GROUP 523

Part number	Tema descr.	Hose ID	Connection
5T1105	1105	5 mm	G 1/8" M
5T1106	1106	6 mm	G 1/8" M
5T1306	1306	6 mm	G 1/4" M
5T1308	1308	8 mm	G 1/4" M
5T1310	1310	10 mm	G 1/4" M
5T1312	1312	12 mm	G 1/4" M
5T1806	1806	6 mm	G 3/8" M
5T1808	1808	8 mm	G 3/8" M
5T1810	1810	10 mm	G 3/8" M
5T1812	1812	12 mm	G 3/8" M
5T1816	1816	16 mm	G 3/8" M
5T1819	1819	19 mm	G 3/8" M

5:20



5552
Hydros cand blow gun

PRODUCT GROUP 520


Part number	Type	Connection
5552-00-20	Blow gun	G 1/4" F



5552
Hydros cand spiral hose

PRODUCT GROUP 520

Part number	Dimension	Work length	Thread
5552-00-01	6.5 x 10 mm	4 m	1/4" M
5552-00-02	8.0 x 12 mm	6 m	3/8" M

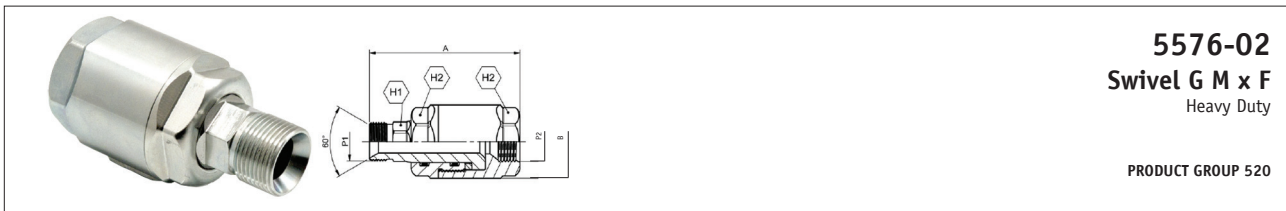

5576-02
Swivel G M x F
Heavy Duty

PRODUCT GROUP 520

Part number	Type	Work.pr max MPa	P1	P2	A	B	H1	H2
5576-02-08	Straight swivel G 1/2"	42,0	G 1/2" M	G 1/2" F	75	39	19,0	33,3
5576-02-12	Straight swivel G 3/4"	42,0	G 3/4" M	G 3/4" F	97	51	33,3	41,3
5576-02-16	Straight swivel G 1"	42,0	G 1" M	G 1" F	110	56	30,1	47,6



5576-03
Swivel UNF M x F
Heavy Duty

PRODUCT GROUP 520


Part number	Type	Work.pr max MPa	P1	P2	A	B	H1	H2
5576-03-12	Straight swivel 3/4"-16 UN	42,0	JIC 3/4"	3/4"-16 o-ring boss	84	38	17,5	32,0
5576-03-17	Straight swivel 1 1/16"-12 UN	42,0	JIC 1 1/16"	1 1/16"-12 o-ring boss	105	51	33,3	41,3
5576-03-21	Straight swivel 1 5/16"-12 UN	42,0	JIC 1 5/16"	1 5/16"-12 o-ring boss	118	56	30,1	47,6



5576-04
Swivel ORFS M x F
Heavy Duty

PRODUCT GROUP 520

Part number	Type	Work.pr max MPa	P1	P2	A	B	H1	H2
5576-04-08	Straight swivel, ORFS 13/16"-16	42,0	ORFS 13/16"	ORFS 13/16	76	39	19,0	33,3
5576-04-12	Straight swivel, ORFS 1 3/16"-12	42,0	ORFS 1 3/16"	ORFS 1 3/16	98	53	27,0	44,5
5576-04-16	Straight swivel, ORFS 1 7/16"-12	42,0	ORFS 1 7/16"	ORFS 1 7/16	111	59	33,3	51,0

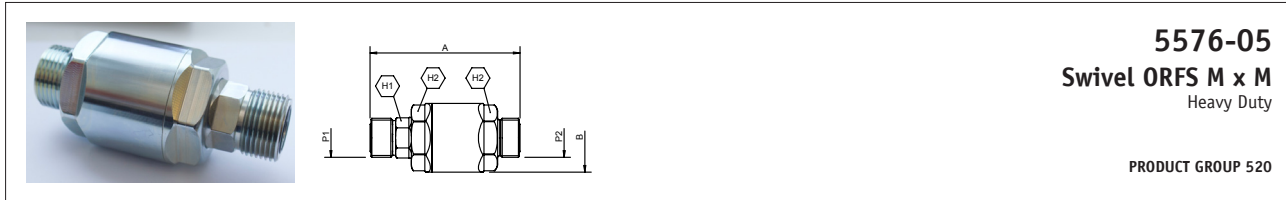


5576-05
Swivel ORFS M x M
Heavy Duty

PRODUCT GROUP 520

Part number	Type	Work.pr max MPa	P1	P2	A	B	H1	H2
5576-05-08	Straight swivel, ORFS 13/16"-16	42,0	ORFS 13/16"	ORFS 13/16	79	39	19,0	33,3
5576-05-12	Straight swivel, ORFS 1 3/16"-12	42,0	ORFS 1 3/16"	ORFS 1 3/16	115	53	27,0	44,5
5576-05-16	Straight swivel, ORFS 1 7/16"-12	42,0	ORFS 1 7/16"	ORFS 1 7/16	130	59	33,3	51,0
5576-05-20	Straight swivel, ORFS 1 11/16"-12	42,0	ORFS 1 11/16"	ORFS 1 11/16"	139	70	40	60,3


*Working pressure is only for the swivel, check the pressure classes on the connections

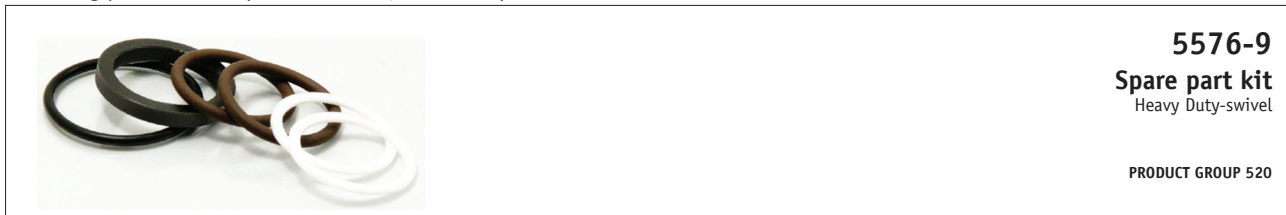

5576-9
Spare part kit
Heavy Duty-swivel


PRODUCT GROUP 520

Part number	Type
5576-90-08	Spare part kit Heavy Duty swivel 1/2", 3/4"-16 UNF
5576-90-12	Spare part kit Heavy Duty swivel 3/4", G 3/4", 1 1/16"-12 UN
5576-90-16	Spare part kit Heavy Duty swivel 1", G 1", 1 5/16"-12 UN
5576-91-08	Spare part kit Heavy Duty swivel 1/2", G 1/2", ORFS 13/16"
5576-91-12	Spare part kit Heavy Duty swivel 3/4" ORFS 1 3/16
5576-91-16	Spare part kit Heavy Duty swivel 1" ORFS 1 7/16"
5576-91-20	Spare part kit Heavy Duty swivel 1 1/4" ORFS 1 11/16"




5576-01
Swivel
Steel
Straight, g-threaded
PRODUCT GROUP 520

Part number	Thread 1	Thread 2	Flow l/m	Rotation PN/MPa	Rotation turns/min
5576-01-04	G 1/4" F	G 1/4" M	25	20.0	212
5576-01-06	G 3/8" F	G 3/8" M	35	20.0	173
5576-01-08	G 1/2" F	G 1/2" M	60	15.0	160
5576-01-12	G 3/4" F	G 3/4" M	100	15.0	120
5576-01-16	G 1" F	G 1" M	180	10.0	100
5576-01-20	G 1 1/4" F	G 1 1/4" M	200	10.0	86
5576-01-24	G 1 1/2" F	G 1 1/2" M	250	8.0	73



5577-01
Swivel
Steel
Elbow 90°, g-threaded
PRODUCT GROUP 520

Part number	Thread 1	Thread 2	Flow l/m	Rotation PN/MPa	Rotation turns/min
5577-01-04	G 1/4" F	G 1/4" M	25	20.0	212
5577-01-06	G 3/8" F	G 3/8" M	35	20.0	173
5577-01-08	G 1/2" F	G 1/2" M	60	15.0	160
5577-01-12	G 3/4" F	G 3/4" M	100	15.0	120
5577-01-16	G 1" F	G 1" M	180	10.0	100
5577-01-20	G 1 1/4" F	G 1 1/4" M	200	10.0	86
5577-01-24	G 1 1/2" F	G 1 1/2" M	250	8.0	73

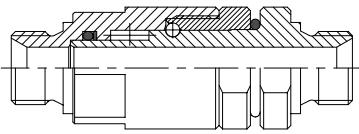


5590
High pressure swivel M x M BSP

Material: Steel/zinc-plated
Seal: Nitrile
Working temperature: -40° - + 110°C

PRODUCT GROUP 520

Part number	Dimension	Spare part kit part number	PN/MPa
5590-08-08	1/2"	5590-03-08	25,0
5590-12-12	3/4"	5590-03-12	23,0



5591
High pressure swivel M BSP F BSP

Material: Steel/zinc-plated
Seal: Nitril
Working temperature: -40° - +110°C

PRODUCT GROUP 520


Part number	Dimension	Spare part kit part number	PN/MPa
5591-04-04	1/4"	5590-03-04	35,0
5591-06-06	3/8"	5590-03-06	30,0
5591-08-08	1/2"	5591-03-08	25,0
5591-12-12	3/4"	5591-03-12	23,0
5591-16-16	1"	5591-03-16	23,0
5591-20-20	1 1/4"	5591-03-20	23,0
5591-24-24	1 1/2"	5590-03-24	23,0



5590
Spare part kit for
high pressure swivel 5590 and 5591


PRODUCT GROUP 520

Part number	Type	Dimension
5590-03-04	Spare part kit	1/4"
5590-03-06	Spare part kit	3/8"
5590-03-08	Spare part kit	1/2"
5590-03-12	Spare part kit	3/4"
5590-03-16	Spare part kit	1"
5590-03-20	Spare part kit	1 1/4"
5590-03-24	Spare part kit	1 1/2"

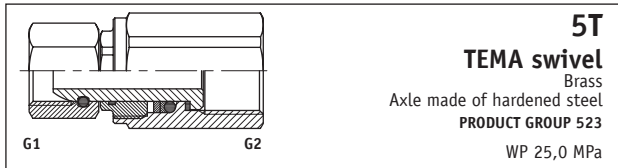


Part number	Thread 1	Material	Thread 2
5T250	G 1/4" FS	Brass	G 3/8" F
5T250RF	G 1/4" FS	Stainless steel	G 3/8" F
5T500	G 1/2" FS	Brass	G 3/4" F
5T500B	G 1/2" FS	Brass	G 1/2" M
5T500RF	G 1/2" FS	Stainless steel	G 3/4" M
5T750	G 3/4" FS	Brass	G 1" F
5T1000*	G 1" FS	Brass	G 1 1/4" F
5T1000RF*	G 1" FS	Stainless steel	G 1 1/4" F

*) WP 20,0 MPa

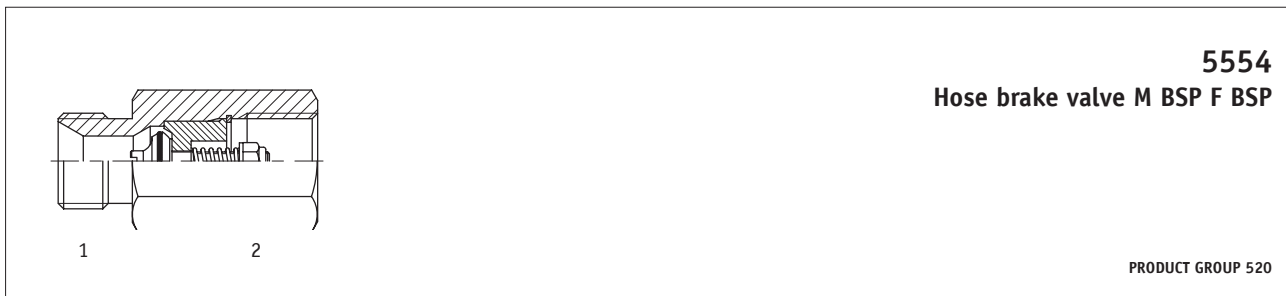

Part number	Thread 1	Thread 2	Flow l/min.	WP BAR
5554-10-04	G 1/2" M	G 1/4" F	10	350
5554-15-06	G 3/8" M	G 3/8" F	15	350
5554-25-06	G 3/8" M	G 3/8" F	25	350
5554-35-06	G 3/8" M	G 3/8" F	35	350
5554-50-06	G 3/8" M	G 3/8" F	50	350
5554-30-08	G 1/2" M	G 1/2" F	30	350
5554-40-08	G 1/2" M	G 1/2" F	40	350
5554-50-08	G 1/2" M	G 1/2" F	50	350
5554-60-08	G 1/2" M	G 1/2" F	60	350
5554-35-12	G 3/4" M	G 3/4" F	35	350
5554-50-12	G 3/4" M	G 3/4" F	50	350
5554-60-12	G 3/4" M	G 3/4" F	60	350
5554-80-12	G 3/4" M	G 3/4" F	80	350
5554-90-12	G 3/4" M	G 3/4" F	100	350
5554-91-12	G 3/4" M	G 3/4" F	120	350

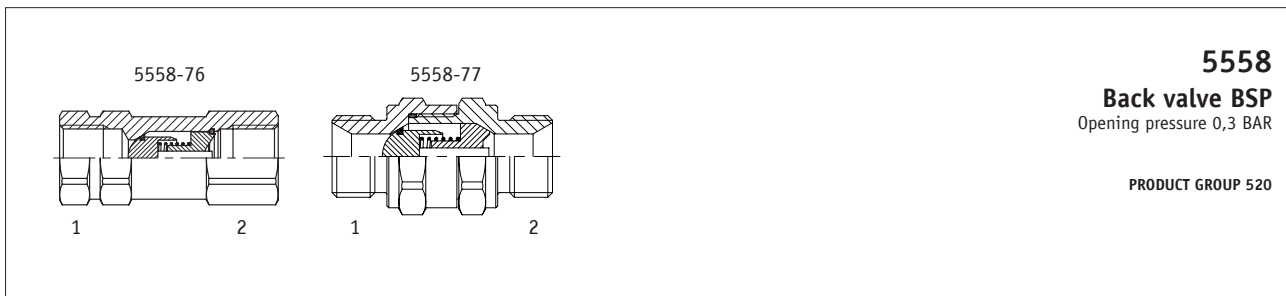

Part number	Thread 1	Thread 2	WP BAR
5558-76-04	G 1/4" F	G 1/4" F	500
5558-76-06	G 3/8" F	G 3/8" F	300
5558-76-08	G 1/2" F	G 1/2" F	350
5558-76-12	G 3/4" F	G 3/4" F	220
5558-76-16	G 1" F	G 1" F	250
5558-76-20	G 1 1/4" F	G 1 1/4" F	220
5558-76-24	G 1 1/2" F	G 1 1/2" F	200
5558-77-04	G 1/4" M	G 1/4" M	500
5558-77-06	G 3/8" M	G 3/8" M	300
5558-77-08	G 1/2" M	G 1/2" M	350